

Q56-200G-PDAC3M-AR-AO

Arista Networks® Compatible 200GBase-CU HDR QSFP56 to QSFP56 Direct Attach Cable (Passive Twinax, 3.0m)

Features

- Compliant with SFF-8636
- Support I2C two line strong interface, easy to control
- Compliant with IEEE802.3bj & IEEE802.3cd
- Operating Temperature: -20 to 75 Celsius
- Low Crosstalk
- Hot-pluggable
- RoHS Compliant and Lead-Free
- Low power



Applications

- Infiniband SDR, DDR, QDR, FDR, EDR, HDR
- 10G/40G/100G/200G Ethernet
- Data Center, Cloud Server

Product Description

This is an Arista Networks® compatible 200GBase-CU HDR QSFP56 to QSFP56 direct attach cable that operates over passive copper with a maximum reach of 3.0m (9.8ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



Electrical Characteristics

Parameter	Requirement	Test Condition						
Differential Impedance								
Cable Impedance	105+5/-10Ω	Rise time of 25ps (20% ~ 80%).						
Paddle Card Impedance	100±10Ω							
Cable Termination Impedance	100±15Ω							
Differential (Input/Output) Return Loss SDD11/SDD22	$\text{Return_loss}(f) \geq \left\{ \begin{array}{ll} 16.5-2vf & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 19 \end{array} \right\}$ <p>Where f is the frequency in GHz Return loss(f) is the return loss at frequency f</p>	10MHz≤f ≤19GHz						
Differential to common mode (Input/Output) Return loss SCD11/SCD22	$\text{Return loss}(f) \geq \left\{ \begin{array}{ll} 22-(20/25.78)f & 0.01 \leq f < 12.89 \\ 15-(6/25.78)f & 12.89 \leq f \leq 19 \end{array} \right\}$ <p>Where f is the frequency in GHz Return loss(f) is the Differential to common-mode return loss at frequency f</p>	10MHz≤f ≤19GHz						
Common mode to common-mode (Input/Output) Return loss SCC11/ SCD22	Return loss (f)≥ 2dB 0.2≤f≤19 Where f is the frequency in GHz Return loss (f) is the common-mode to common-mode return loss at frequency f	10MHz≤f ≤19GHz						
Low Level Contact Resistance	70 milliohms Max. From initial.	EIA-634-23: Apply a maximum voltage of 20mV and current of 100 mA.						
Insulation Resistance	10 Mohm (Min)	EIA364-21:AC 300V 1minute						
Dielectric Withstanding Voltage	NO disruptive discharge	EIA-364-20: Apply a voltage of 300 VDC for 1 minute between adjacent terminals and between adjacent terminals and ground						
Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture								
Differential Insertion Loss (SDD21 Max)	F AWG	1.25GHz	2.5GHz	5.0GHz	7.0GHz	10Ghz	12.89Ghz	10MHz≤f ≤19GHz
	30(1m) Max.	4.5dB	5.4dB	6.3dB	7.5dB	8.5dB	10.5dB	
	30/28(3m)Max.	7.5dB	9.5dB	12.2dB	14.8dB	18.0dB	21.5dB	
	26(3m) Max.	5.7dB	7.2dB	9.9 dB	11.9dB	14.1dB	16.5dB	
	26/25(5m)Max.	7.8dB	10.0dB	13.5dB	16.0dB	19.0dB	22.0dB	
Insertion Loss Deviation	-0.176*f - 0.7 ≤ ILD ≤ 0.176* f + 0.7						50MHz≤f ≤19GHz	
Differential to common mode conversion Loss-Differential Insertion Loss (SCD21-SDD21)	$\text{Conversion loss}(f) - \text{IL}(f) \geq \left\{ \begin{array}{ll} 10 & 0.01 \leq f < 12.89 \\ 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{array} \right\}$ <p>Where f is the frequency in GHz Conversion_loss (f) is the cable assembly differential to common-mode conversion loss IL (f) is the cable assembly insertion loss</p>						10MHz≤f ≤19GHz	

MDNEXT (multiple disturber near-end crosswalk)	≥26dB @12.89GHz	10MHz≤f ≤19GHz
Intra Skew	15ps/m	10MHz≤f ≤19GHz

Environment Performance

Parameter	Requirement	Test Condition
Operating Temperature Range	-20°C to +75°C	Cable operating temperature range
Storage Temperature Range	-40°C to +80°C	Cable storage temperature range in packed condition
Thermal Cycling Non-Powered	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min, dwells
Salt Spraying	48 hours salt spraying after shell corrosive area less than 5%	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing (Fpr connector only)	EIA-364-35 Class II, 14 days.
Temp. Life	No evidence of physical damage	EIA-364-17C w/RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H No evidence of physical damage	Condition: -20°C ±2°C, mandrel diameter is 6 times the cable diameter.

Mechanical and Physical Characteristics


Parameter	Requirement	Test Condition
Vibration	Pass electrical tests per 3.1 after stressing	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to cable plug below 90N. Per SFF-8432 Rev 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing	Clamp and shock per EIA-364-27B, TC- G,3 times in 6 directions, 100g, 6ms.
Cable Plug Insertion	40N Max (QSFP28)	Per SFF8661 Rev 2.1
Cable plug Extraction	30N Max (QSFP28)	Place axial load on de-latch to de-latch plug.Per SFF8661

		Rev 2.1
Durability	50 cycles, No evidence of physical damage	EIA-364-09, perform plug & unplug cycles: Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB)

Wiring Diagram

X1	X2	Remarks	X1	X2	Remarks
18 (RX1-)	37(TX1-)	Pair	37(TX1-)	18 (RX1-)	Pair
17 (RX1+)	36 (TX1+)		36 (TX1+)	17 (RX1+)	
15 (RX3-)	34 (TX3-)	Pair	34 (TX3-)	15 (RX3-)	Pair
14 (RX3+)	33 (TX3+)		33 (TX3+)	14 (RX3+)	
6 (TX4+)	25 (RX4+)	Pair	25 (RX4+)	6 (TX4+)	Pair
5 (TX4-)	24 (RX4-)		24 (RX4-)	5 (TX4-)	
3 (TX2+)	22 (RX2+)	Pair	22 (RX2+)	3 (TX2+)	Pair
2 (TX2-)	21 (RX2-)		21 (RX2-)	2 (TX2-)	
1, 4, 7, 13, 16, 19, 20, 23, 26, 32,35,38	1, 4, 7, 13, 16, 19,20, 23, 26, 32, 35, 38	GND	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	EEPROM point at both ends

Mechanical Specifications

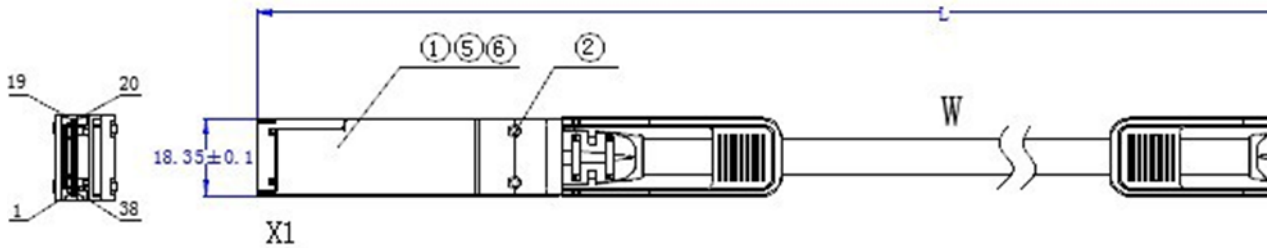

UNIT: mm

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesupportemea@addonnetworks.com

Telephone: +44 1285 842070