


ADD-QSFPDD-EDFA-DUAL-20DB-J

Juniper Networks® Compatible QSFP-DD Dual Pluggable EDFA Booster amplifier for DWDM, Duplex LC, Nominal gain +20dB

Features:

- QSFP-DD MSA Compliant Electrical and Mechanical Interfaces
- QSFP-DD Dual Pluggable EDFA Booster and Amplifier
- C-Band 8-Channel DWDM Amplification
- 20dB Nominal Gain with Automatic Gain Control
- Duplex LC Connector
- Power Dissipation Maximum of 3W
- Operating Temperature: 0 to 70 Celsius
- RoHS compliant and lead-free

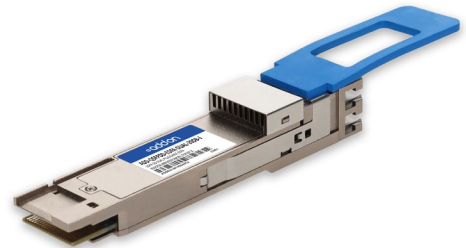

Product Description:

This Juniper Networks® compatible QSFP-DD dual pluggable EDFA booster amplifier offers a optical input range and provides a +20dB nominal gain to a C-Band DWDM link. The dual pluggable EDFA connects to a composite DWDM link via an LC connector. It is configured for Automatic Gain Control (AGC) by default and can be further configured via CLI prompt in supported hosts or by our coding and tuning system.

General Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	V _{CC}	3.13	3.3	3.46	VDC
Storage Temperature	T _{stg}	-40		85	°C
Operating Temperature	T _c	-5	25	70	°C
Humidity	H	10		85	%
Power Dissipation	P _{DISS}			3	W

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Wavelength	λ	1542		1554	nm	
Channel Number		1		8		
Input Power	P _{in}	-20		-11	dBm	
Output Power	P _{out}		9	14	dBm	
Optical Power Shutdown	P _{off}			-30	dBm	1
Output Power Variation	Δ POUT	-0.5		0.5	dB	
Gain			20		dB	
Gain Flatness	GF			1.0	dB	2
Gain Accuracy	Δ G	-1		1	dB	
Noise Figure	NF_PA			8	dB	
	NF_BA			10	dB	
Transient Performance				3	dB	3
Return Loss	RL	40			dB	
VOA Attenuation Range				30	dB	

Notes:

1. Assert when both BA and PA input signals are at loss.
2. Peak-to-peak.
3. 3dB add/drop.
4. PA and BA share the same value if not specified.

Pin Descriptions

Pin	Logic	Symbol	Name/Description	Plug Sequence	Notes
1		GND	Module Ground.	1B	1
2	CML-I	Tx2-	Not Connected.	3B	
3	CML-I	Tx2+	Not Connected.	3B	
4		GND	Module Ground.	1B	1
5		Tx4-	Not Connected.	3B	
6		Tx4+	Not Connected.	3B	
7		GND	Module Ground.	1B	1
8	LVTTL-I	ModSelL	Module Select.	3B	
9	LVTTL-I	ResetL	Module Reset.	3B	
10		VccRx	+3.3V Receiver Power Supply.	2B	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock.	3B	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data.	3B	
13		GND	Module Ground.	1B	1
14	CML-O	Rx3-	Not Connected.	3B	
15	CML-O	Rx3+	Not Connected.	3B	
16		GND	Module Ground.	1B	1
17	CML-O	Rx1-	Not Connected.	3B	
18	CML-O	Rx1+	Not Connected.	3B	
19		GND	Module Ground.	1B	1
20		GND	Module Ground.	1B	1
21	CML-O	Rx2-	Not Connected.	3B	
22	CML-O	Rx2+	Not Connected.	3B	
23		GND	Module Ground.	1B	1
24	CML-O	Rx4-	Not Connected.	3B	
25	CML-O	Rx4+	Not Connected.	3B	
26		GND	Module Ground.	1B	1
27	LVTTL-O	ModPrsL	Module Present.	3B	
28	LVTTL-O	IntL/RxLOS	Interrupt/Optional RxLOS.	3B	
29		VccTx	+3.3V Transmitter Power Supply.	2B	2
30		Vcc1	+3.3V Power Supply.	2B	2
31	LVTTL-I	LPMode/TxDis	Optional Tx Disable.	3B	
32		GND	Module Ground.	1B	1
33	CML-I	Tx3-	Not Connected.	3B	
34	CML-I	Tx3+	Not Connected.	3B	
35		GND	Module Ground.	1B	1


36	CML-I	Tx1-	Not Connected.	3B	
37	CML-I	Tx1+	Not Connected.	3B	
38		GND	Module Ground.	1B	1
39		GND	Module Ground.	1A	1
40	CML-I	Tx6-	Not Connected.	3A	
41	CML-I	Tx6+	Not Connected.	3A	
42		GND	Module Ground.	1A	1
43	CML-I	Tx8-	Not Connected.	3A	
44	CML-I	Tx8+	Not Connected.	3A	
45		GND	Module Ground.	1A	1
46	LVC MOS/CML-I	P/VS4	Not Connected.	3A	4
47	LVC MOS/CML-I	P/VS1	Not Connected.	3A	4
48		VccRx1	+3.3V Power Supply.	2A	2
49	LVC MOS/CML-O	P/VS2	Not Connected.	3A	4
50	LVC MOS/CML-O	P/VS3	Not Connected.	3A	4
51		GND	Module Ground.	1A	1
52	CML-O	Rx7-	Not Connected.	3A	
53	CML-O	Rx7+	Not Connected.	3A	
54		GND	Module Ground.	1A	1
55	CML-O	Rx6-	Not Connected.	3A	
56	CML-O	Rx6+	Not Connected.	3A	
57		GND	Module Ground.	1A	1
58		GND	Module Ground.	1A	1
59	CML-O	Rx6-	Not Connected.	3A	
60	CML-O	Rx6+	Not Connected.	3A	
61		GND	Module Ground.	1A	1
62	CML-O	Rx8-	Not Connected.	3A	
63	CML-O	Rx8+	Not Connected.	3A	
64		GND	Module Ground.	1A	1
65		NC	Not Connected.	3A	3
66		Reserved	For Future Use.	3A	3
67		VccTx1	+3.3V Transmitter Power Supply.	2A	2
68		Vcc2	+3.3V Power Supply.	2A	2
69	LVC MOS-I	ePPS/Clock	Not Connected.	3A	5
70		GND	Module Ground.	1A	1
71	CML-I	Tx7-	Not Connected.	3A	
72	CML-I	Tx7+	Not Connected.	3A	

73		GND	Module Ground.	1A	1
74	CML-I	Tx5-	Not Connected.	3A	
75	CML-I	Tx5+	Not Connected.	3A	
76		GND	Module Ground.	1A	1

Notes:

1. QSFP-DD uses common ground (GND) for all signal and supply (power). All are common within the QSFP-DD module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane. Each connector GND contact is rated for a maximum current of 500mA.
2. VccRx, VccRx1, Vcc1, Vcc2, VccTx, and VccTx1 shall be applied concurrently. Supply requirements defined for the host side of the Host Card Edge Connector. For power classes 4 and above, the module differential loading of input voltage pins must not result in exceeding contact current limits. Each connector Vcc contact is rated for a maximum current of 1500mA.
3. Reserved and Not Connected pins are recommended to be terminated with 10k Ω to ground on the host. Pin 65 (Not Connected) shall be left unconnected within the module.
4. Full definitions of the P/VSx signals currently under development. On new designs, unused P/VSx signals are recommended to be terminated on the host with 10k Ω .
5. ePPS/Clock, if not used, is recommended to be terminated with 50 Ω to ground on the host.
6. Plug Sequences specifies the mating sequence of the host connector and module. The sequence is 1A, 2A, 3A, 1B, 2B, and 3B. Contact sequence A will make, then break, contact with additional QSFP-DD pins. Sequence 1A and 1B will then occur simultaneously, followed by 2A and 2B, followed by 3A and 3B.


Electrical Pin-Out Details

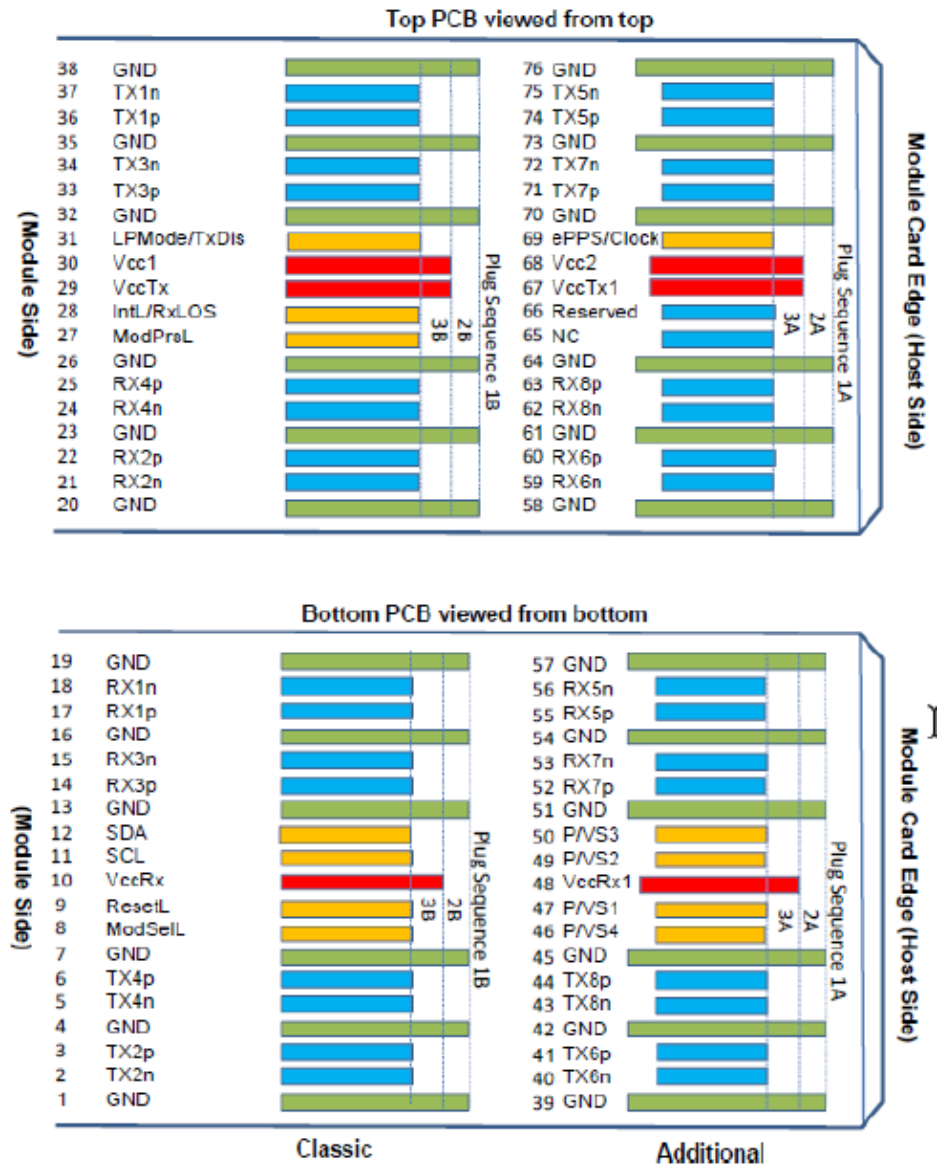

Product Sketch Map




Mechanical Specifications

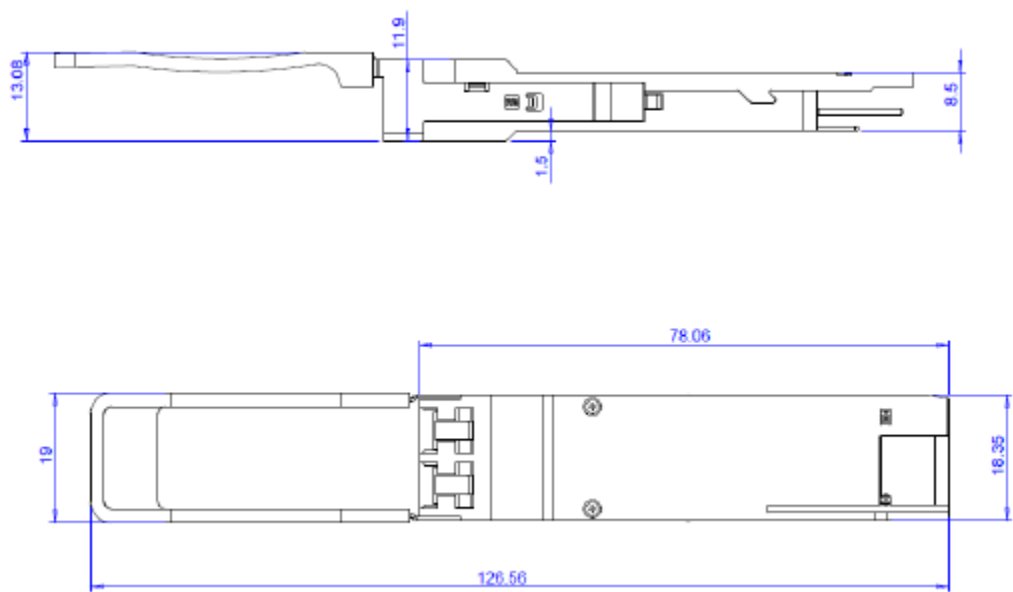

Notes:

- 1. All dimensions are in mm.
- 2. This module’s design is QSFP-DD Multi-Sourcing Agreement (MSA) compliant.

Optical Port Layout

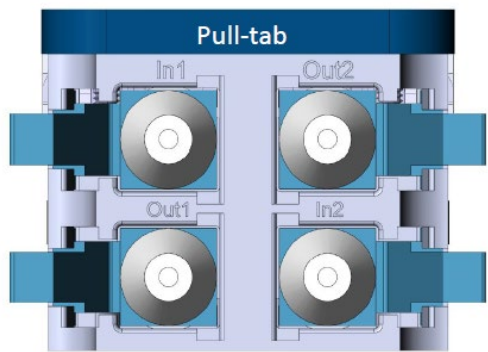

Parameter	Specification	Connector
In1	PA Input	LC/UPC
Out1	PA Output	LC/UPC
In2	BA Input	LC/UPC
Out2	BA Output	LC/UPC

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesupportemea@addonnetworks.com

Telephone: +44 1285 842070