



EQUIP SAFE OUTDOOR 19' CABINET, 09U, 600X450MM, RAL7035 GREY

Product Images



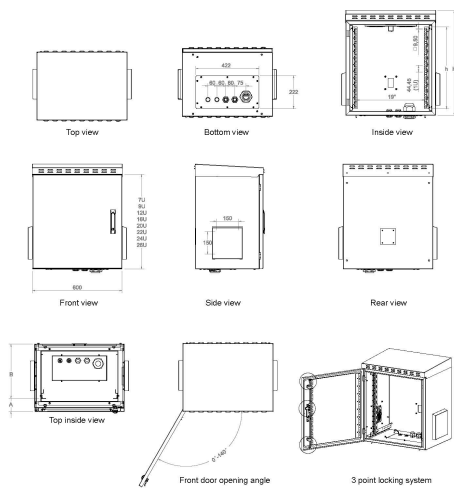

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

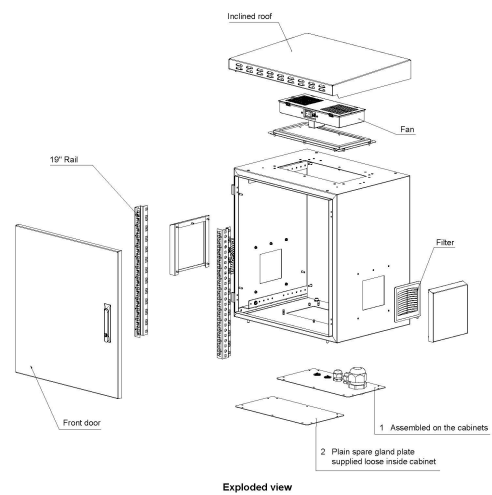

Short Description

- 9U cabinet, designed for optimal performance in every space
- 600X450MM Outdoor Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a robust steel frontdoor to prioritize security and long-lasting durability

Description

The "Safe Outdoor" Cabinet Line presents the 483 mm (19") IP55 Outdoor Wall Mount Cabinets, tailored for industrial use. Adhering to the IP55 safety standard as per EN 60529, they offer resistance against both water and dirt infiltration. Enhanced security is ensured with a 3-point-locking system complemented by a lockable swing handle and insulated cable entry points. The cabinets also feature integrated air ventilation slots for fresh air circulation, maintaining protection against water and dust as per IP54 standards. These cabinets are ideal for locations exposed to environmental elements like rain, dust, sleet, snow, and splashing water. For more flexibility, these cabinets can be paired with a plinth for standalone setups. When using the plinth, rear mounting holes can be sealed using plugs sourced from the cabinet's base.

Additional Information

Number of cartons per pallet	16 piece
Pallet net weight	16000 gram
Pallet gross volume	3646500 cubic_centimeter
Package volume	9936000 cubic_centimeter
Maximum number of stacking cartons	16 piece
Pallet net length	1300 millimeter
Pallet net width	1100 millimeter
Pallet net height	2550 millimeter
Manual	No
Mounting kit	No
Size (imperial)	13.6 inch
Height	579 millimeter
Width	450 millimeter
Depth	600 millimeter
Material thickness	10.5 millimeter
Inner height	400 millimeter
Inner width	595 millimeter
Minimum rack depth supported	260 millimeter
Maximum rack depth supported	385 millimeter
Inner depth	445 millimeter
Weight	33000 gram
Wall mountable	Yes
Key lock	Yes
Housing material	Steel
Built-in UPS	No
Rack rails	No

Frame type	Closed
Assembly required	No
Preassembled	Yes
Soundproof	No
Castor wheels	No
Type	Wall mounted rack
Rack capacity	9U
Removable back door	No
Removable front door	Yes
Back door construction	Steel
Front door construction	Steel
Side panel construction	Steel
Side panel key lock	No
Back door key lock	No
Front door key lock	Yes
Side panels included	No
Rack rail thickness	1.5 millimeter
Stabilizing foot screw	No
Adjustable stand	Yes
Monitoring	No
Main PDU	No
Product design	2-Post
Cooling type	Passive
Door opening angle	140 degree
Mounting hole shape	Square
Removable side panels	No
Number of layers per pallet	4 piece

Pallet gross weight	580320 gram
Harmonized System (HS) code	853710980019
Carbon footprint	5.643 kilogram
Quantity per pallet	16 piece
Sustainability compliance	Yes
Screws included	No
Wall mounting kit	Yes
Temperature sensor	No
Quantity per pack	16 piece
Plinth panel	No
Nuts included	Yes
Number of nuts	1
Package depth	480 millimeter
Package height	600 millimeter
Package width	690 millimeter
Grounding kit	Yes
Quick installation guide	No
Package weight	2270 gram
Adjustable feet	No
Adjustable depth	No
Cable management	No
Color	Light Grey
EAN	4015867232385
Model Number	ESO-09-6045-G

