



EQUIP DYNAMIC FLEX 19' CABINET, 26U, 600X600MM, RAL7035 GREY

Product Images



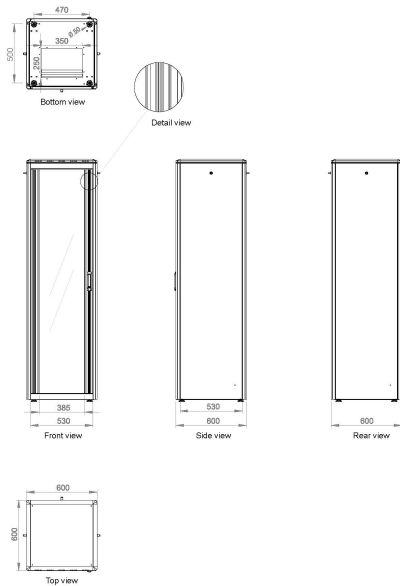

Max/std/min equipment mounting distance

	h	H
12U	533 mm	720 mm
16U	711 mm	898 mm
20U	889 mm	1076 mm
22U	978 mm	1164 mm
26U	1155 mm	1342 mm
32U	1422 mm	1609 mm
36U	1600 mm	1787 mm
39U	1733 mm	1920 mm
42U	1967 mm	2053 mm
46U	2000 mm	2187 mm
47U	2089 mm	2276 mm

Short Description

- 26U cabinet, designed for optimal performance in every space
- 600X600MM Network Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a tempered glass frontdoor to provide unmatched strength while maintaining clear visibility
- Sidepanels are removable and lockable
- Backpanel is removable

Description

Introducing the "Dynamic Flex Line" Cabinets: Designed for user-friendly installation of active and passive network components, these cabinets prioritize efficient cable management. Constructed from steel sheets up to 1.5 mm thick, each cabinet ensures exceptional stability, thanks to a unique plate curving technique. They are elegantly finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). In scenarios where the installation location is hard to access, the cabinet can be effortlessly disassembled. Its doors are designed for easy removal, with the flexibility to switch the door stop's orientation from right to left. The cabinet's roof features an additional lid, equipped with air ventilation slots to promote better airflow. It's also prepped for the addition of an air ventilation unit. Internally, each cabinet boasts two sets (4 pieces) of 483 mm (19") profile rails, which are galvanized and feature height unit markings readable from both directions. These rails are adjustable in depth and come with extra depth support bars, ensuring comprehensive 483 mm (19") equipment installations. A highlight of the design is the emphasis on cable management. The cabinet base incorporates a sliding cable entry panel sealed with rubber. Cabinets of 26U and above are outfitted with two cable entries featuring brush strips at the rear, both above and below the door. The 800 mm width cabinets offer advanced cable management options, including additional cable entries with brushes on the top and base. Additionally, these wider cabinets include vertical cable ducts with shutters on both sides, adjacent to the 483 mm (19") profile rails in the front. To address diverse operational needs, a comprehensive range of accessories, including cable management tools and shelves, is available, ensuring adaptability in everyday use.

Additional Information

Number of cartons per pallet	1 piece
Pallet net weight	6800 gram
Pallet gross volume	69360 cubic_centimeter
Package volume	34263840 cubic_centimeter
Maximum number of stacking cartons	1 piece
Pallet net length	680 millimeter
Pallet net width	680 millimeter
Pallet net height	150 millimeter
Manual	Yes
Mounting kit	No
Size (imperial)	14.6 inch
Height	1342 millimeter
Width	600 millimeter
Depth	600 millimeter
Material thickness	59.5 millimeter
Inner height	1155 millimeter
Inner width	590 millimeter
Minimum rack depth supported	360 millimeter
Maximum rack depth supported	540 millimeter
Inner depth	590 millimeter
Weight	52700 gram
Wall mountable	No
Maximum weight capacity	600 kilogram
Key lock	Yes
Housing material	Steel
Built-in UPS	No

Rack rails	Yes
Frame type	Closed
Feet adjustment	30 millimeter
Assembly required	No
Preassembled	Yes
Soundproof	No
Castor wheels	No
Type	Freestanding rack
Rack capacity	26U
Removable back door	Yes
Removable front door	Yes
Maximum weight capacity (rolling)	600 kilogram
Back door construction	Steel
Front door construction	Tempered glass
Side panel construction	Steel
Side panel key lock	Yes
Back door key lock	No
Front door key lock	Yes
Side panels included	Yes
Rack rail thickness	1.5 millimeter
Stabilizing foot screw	Yes
Number of stabilizing foot screws	4 piece
Adjustable stand	No
Monitoring	No
Main PDU	No
Product design	4-Post
Cooling type	Passive

Door opening angle	120 degree
Removable side panels	Yes
Number of layers per pallet	1 piece
Pallet gross weight	62200 gram
Harmonized System (HS) code	853710980019
Carbon footprint	9.0117 kilogram
Quantity per pallet	1 piece
Sustainability compliance	Yes
Number of screws	28
Screws included	Yes
Wall mounting kit	No
Temperature sensor	No
Quantity per pack	1 piece
Plinth panel	No
Nuts included	Yes
Number of nuts	28
Package depth	680 millimeter
Package height	1482 millimeter
Package width	680 millimeter
Grounding kit	Yes
Quick installation guide	No
Package weight	2700 gram
Adjustable feet	Yes
Adjustable depth	No
Cable management	No
Color	Light Grey
EAN	4015867232897

