


351005 58/80mm Thermal POS Receipt Printer with Auto Cutter, USB/Ethernet/Serial/Cash Drawer connection

Product Images



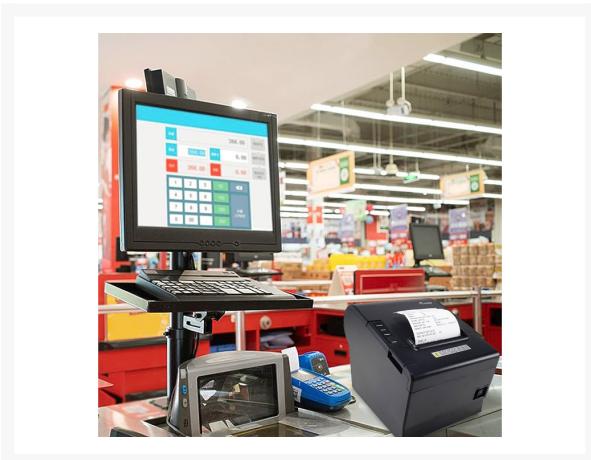

Short Description

- Wide compatibility with most types of business software
- High-speed, stable with low-noise printing
- Easy paper loading system
- Compatible with POS/ESC command set
- Thermal printing, no need for ink ribbon and toner
- Work with standard 50/80mm thermal paper

Description

The equip 58/80mm Thermal POS Receipt Printer with Auto Cutter is a fast, reliable, and compact solution for retail, hospitality, and service environments. Designed to support both 58mm and 80mm paper widths, it provides flexibility to meet different business needs while ensuring sharp, high-resolution print quality for receipts, tickets, and vouchers.

Featuring a high-speed thermal printing mechanism, it reduces wait times at checkout and improves customer satisfaction. The integrated auto cutter delivers clean, precise cuts every time, minimizing paper jams and ensuring smooth operation during peak hours. Easy connectivity options such as USB, Ethernet, or Bluetooth (model dependent) allow seamless integration with a wide range of POS systems. With its durable construction, low noise, and energy-efficient thermal technology, this printer is built to handle heavy daily workloads. Compact and stylish, it is an excellent choice for businesses seeking a dependable and cost-effective receipt printing solution.

Additional Information

Point x mm (dot).	8dots/mm
Print Resolution (dpi).	203dpi
Printing Speed (mm/s).	300mm/s
POS Programming Language.	ESC/POS
RFID Support.	No
Supported Barcode Type.	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128/QR CODE
Badge printing.	No
Color Badge Printing.	No
Double-side badge printing.	No
Film Stripper.	No
Maximum print width.	72mm / 48mm
Rewinder.	No
Shell material.	ABS+PC
Wireless connection.	No
Printheads lifespan.	100km
Magnetic stripe encoder.	No
Power input.	Power Adapter + Power Cord, 100-240V/AC,50-60Hz
Power Output.	Cash Drawer Control: DC 24V
Power supply.	24V / 1.5A
Approval and Compliance.	CE , RoHS
Operating humidity.	20% RH ~ 80% RH
Operating temperature.	-10°C ~ 50°C
Compatible operating systems.	Windows 7/8/10/11 UBUNTU 12.04 32/64 UBUNTU 14.04 32/64 Linux Android Mac OS 11.1 or above

Package Contents.	58/80mm Thermal POS Receipt Printer x 1 Power adapter x 1 Power cord x 1 USB cable x 1 Serial cable x 1 Thermal paper roll x 1 Resource CD x 1 Quick installation guide x 1 Baffle x 1
Color.	Black
EAN.	4015867242551
Model Number.	351005
Dimensions (W x D x H).	195 x 145 x 143.3 mm
Product weight (kg).	1.2

