

3FE47581BB-AO

Alcatel-Lucent Nokia® 3FE47581BB Compatible TAA Combo PON OLT (SMF, 1577nmTx/1270nmRx and 1490nmTx/1310nmRx, N2/C+, SC, DOM)

Features

- Compliant with ITU-T G.984.5 (2014)/Amd.2 (10/2020)
- Compliant with SFF-8472 Rev. 11.0
- GPON & XGS-PON N2 OPL Class C+
- Single-Mode Fiber
- SC Optical Connector
- Compliant with SFP-DD Hardware Rev. 4.2
- Hot-Pluggable
- Operating Temperature: 0 to 70 Celsius
- RoHS Compliant and Lead-Free



Applications

- XGS-PON and GPON Combo OLT N2 C+

Product Description

This Alcatel-Lucent Nokia® 3FE47581BF compatible Combo PON OLT class N2/C+ SFP-DD transceiver provides 9.95Gbs/9.95Gbs and 2.48Gbs/1.24Gbs throughput up to 20km over single-mode fiber (SMF) using a wavelength of 1577nmTx/1270nmRx and 1490nmTx/1310nmRx via an SC connector. This product is in compliance with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	0		3.6	V	
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Operating Relative Humidity	RH	5		+85	%	
XGS Rx Optical Isolation (From External 1290nm-1650nm)	ISO	-30			dB	
Reflectance of XGS Rx (1260nm-1280nm)				-12	dB	
GPON Rx Optical Isolation (From External 1260nm-1280nm)	ISO	-30			dB	
GPON Rx Optical Isolation (From External 1342nm-1650nm)	ISO	-30			dB	
Reflectance of GPON Rx (1290nm-1330nm)				-20	dB	
Differential Power Range				20	dB	1

Notes:

1. Power differential between sequential ONU bursts.

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.14	3.3	3.47	V	
Power Consumption				4	W	
Transmitter (9.953G)						
Data Input Differential Swing	VIN	200		850	mVp-p	
Input Differential Impedance	ZIN		100		Ω	
Tx_Disable Voltage	VIL	0		0.8	V	
	VIH	2		3.3	V	
Transmitter Fault Voltage - Low	VTF,L	0		0.4	V	
Transmitter Fault Voltage - High	VTF,H	2.4		Vcc	V	
Transmitter (2.488G)						
Data Input Differential Swing	VIN	200		850	mVp-p	
Input Differential Impedance	ZIN		100		Ω	
Tx_Disable Voltage	VIL	0		0.8	V	
	VIH	2		3.3	V	
Transmitter Fault Voltage - Low	VTFI,L	0		0.4	V	
Transmitter Fault Voltage - High	VTFI,H	2.4		Vcc	V	

Receiver (9.953G)						
Data Output Differential Swing	VOUT	300		800	mVp-p	
Signal Detected Voltage - Low	VSD,L	0		0.4	V	
Signal Detected Voltage - High	VSD,H	2.4		Vcc	V	
Receiver (2.488G)						
Data Output Differential Swing	VOUT	300		800	mVp-p	
Signal Detected Voltage - Low	VSD,L	0		0.4	V	
Signal Detected Voltage - High	VSD,H	2.4		Vcc	V	
Receiver (1.244G)						
Data Output Differential Swing	VOUT	300		800	mVp-p	
Signal Detected Voltage - Low	VSD,L	0		0.4	V	
Signal Detected Voltage - High	VSD,H	2.4		Vcc	V	


Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter (9.953G)						
Center Wavelength	λ_C	1575	1577	1580	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Average Launch Power	Aop	5		8	dBm	
Average Launch Power - Off	Poff			-39	dBm	
Extinction Ratio	ER	8.2			dB	
Transmitter Tolerance to Reflected Power		-15			dB	
Eye Diagram		ITU-T G.9807.1 Compliant				
Transmitter (2.488G)						
Center Wavelength	λ_C	1480	1490	1500	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Average Launch Power	Aop	3		7	dBm	
Average Launch Power - Off	Poff			-40	dBm	
Extinction Ratio	ER	8.2			dB	
Transmitter Tolerance to Reflected Power		-15			dB	
Eye Diagram		ITU-T G.984.2 Compliant				
Receiver (9.953G)						
Operating Wavelength	λ_C	1260	1270	1280	nm	
Sensitivity	PSEN			-29	dBm	1
Saturation	PSAT	-8			dBm	1

RSSI Timing Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Packet Length		575			ns	
RSSI Trigger Delay	Td	100			ns	
RSSI Trigger Width	Tw	500			ns	
RSSI Sampling Time	TSAMPLE	500			ns	
Delay Before Read	Ts	500			us	

XGSPON Rx Burst Timing

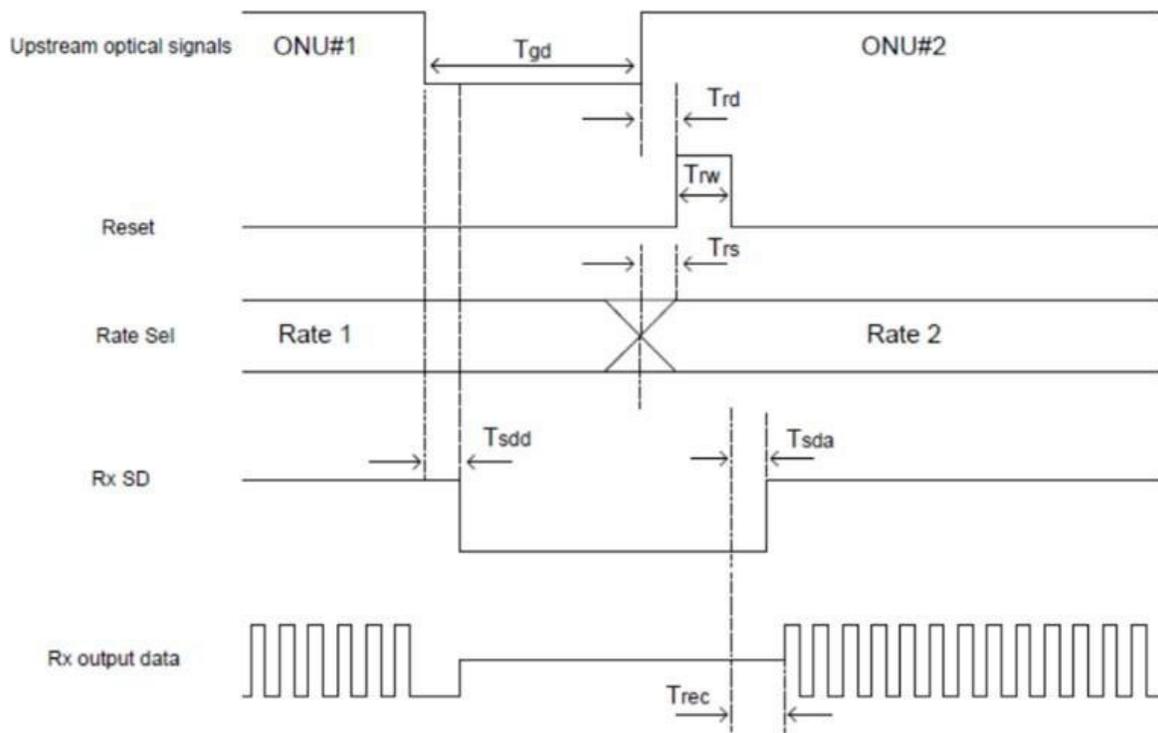


Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Guard Time	Tgd	51.2			ns	
Reset Delay	Trd	0			ns	1
Reset Width	Trw	25.6			ns	
RateSel Setup Time	Trs	5			ns	2
SD Assert Time	Tsda	0		51.2	ns	
SD De-Assert Time	Tsdd		100		ns	3
Data Recovery Time	Trec	0	51.2	100	ns	

Notes:

1. Reset pulse is suggested to be fully inside the preamble.
2. The polarity of RateSel signal could be customized, high = 10G rate, low = 2.5G rate by default.
3. Signal detect auto reset function is applied. The signal detects de-assert time forced by auto reset is typically 100ns and could shorten to about 12.8ns with additional reset pulse.

GPON Rx Burst Timing

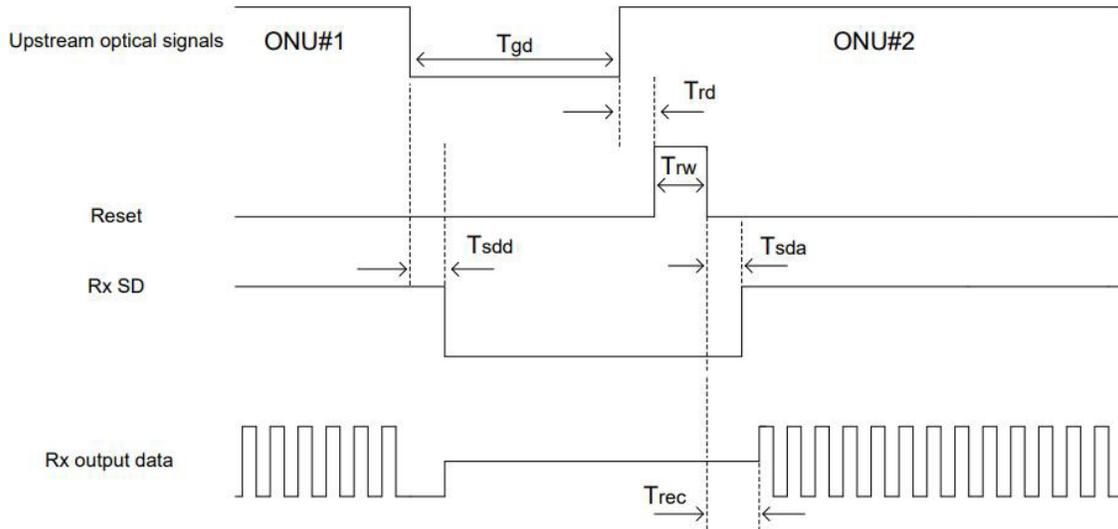


Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Guard Time	Tgd	25.6			ns	
Reset Delay	Trd	0			ns	1
Reset Width	Trw	12.8			ns	
SD Assert Time	Tsda	0	25.6	51.2	ns	
SD De-Assert Time	Tsdd		100		ns	2
Data Recovery Time	Trec	0	25.6	100	ns	

Notes:

1. Reset pulse is suggested to be fully inside the preamble.
2. Signal detect auto reset function is applied. The SD de-assert time forced by auto reset is typically 100ns and could shorten to about 12.8ns with additional reset pulse.


Recommended Host Board Power Supply Filtering Network

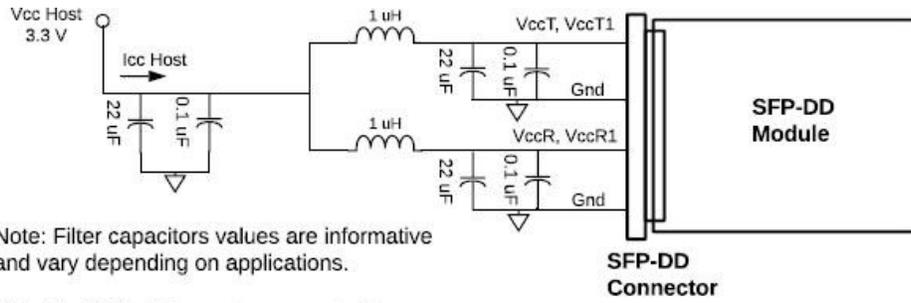

Note: Filter capacitors values are informative and vary depending on applications.

Note: VccT, VccT1 may be connected to VccR, VccR1 provided the applicable derating of the maximum current limit is used.

Recommended Host Circuit

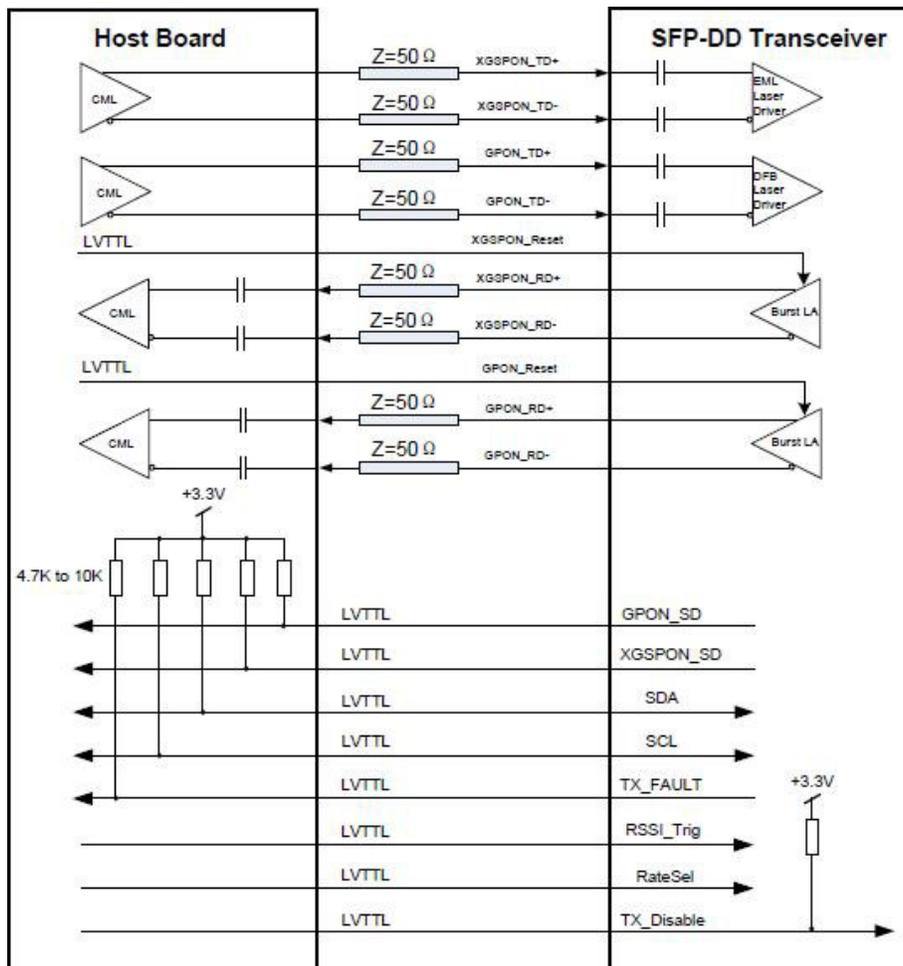


Pin Descriptions

Pin	Logic	Symbol	Name/Description	Notes
1	LVTTTL-I	Rate_S1	2..488G = Low, 9.953G = High.	
2	LVTTTL-O	Tx_Fault1	XGS Transmit Fault, Active High.	
3	LVTTTL-I	Tx_Disable1	Active High to Disable XGSPON.	
4	LVTTTL-I/O	SDA	2-Wire Serial Interface SDA.	
5	LVTTTL-I	SCL	2-Wire Serial Interface SCL.	
6		MOD_ABS	Module Ground.	
7	LVTTTL-I	RESET1	Reset for XGSPON LA, Active High.	
8	LVTTTL-O	Rx_SD1	XGS Receiver Signal Detect, Logic 1 Indicates Normal Operation.	
9	LVTTTL-I	RSSI_Trigger1	XGS RSSI Trigger Input, Active High.	
10		GND	Module Ground.	
11		GND	Module Ground.	
12	CML-O	RD1-	Inverted XGSPON Received Data Output, DC Coupling.	
13	CML-O	RD1+	XGSPON Received Data Output, DC Coupling.	
14		GND	Module Ground.	
15		Vcc	+3.3V Power Supply.	
16		Vcc	+3.3V Power Supply.	
17		GND	Module Ground.	
18	CML-I	TD1+	XGS Transmit Data Input, AC Coupling.	
19	CML-I	TD1-	Inverted XGS Transmit Data Input, AC Coupling.	
20		GND	Module Ground.	
21		GND	Module Ground.	
22	LVTTTL-O	Tx_Fault2	GPON Transmit Fault, Active High.	
23	LVTTTL-I	Tx_Disable2	Active High to Disable GPON.	
24		NC	Reserved.	
25		NC	Reserved.	
26		NC	Reserved.	
27	LVTTTL-I	RESET2	Reset for GPON, Active High.	
28	LVTTTL-O	Rx_SD2	GPON Receiver Signal Detect, Logic 1 Indicates Normal Operation.	
29	LVTTTL-I	RSSI_Trigger2	GPON RSSI Trigger Input, Active High.	
30		GND	Module Ground.	
31		GND	Module Ground.	
32	CML-O	RD2-	Inverted GPON Received Data Output, DC Coupling.	
33	CML-O	RD2+	GPON Received Data Output, DC Coupling.	
34		GND	Module Ground.	
35		Vcc	+3.3V Power Supply.	
36		Vcc	+3.3V Power Supply.	
37		GND	Module Ground.	
38	CML-I	TD2+	GPON Transmit Data Input, AC Coupling.	


39	CML-I	TD2-	Inverted GPON Transmit Data Input, AC Coupling.	
40		GND	Module Ground.	

EEPROM Definitions





XGSPON Digital Diagnostic Memory Map

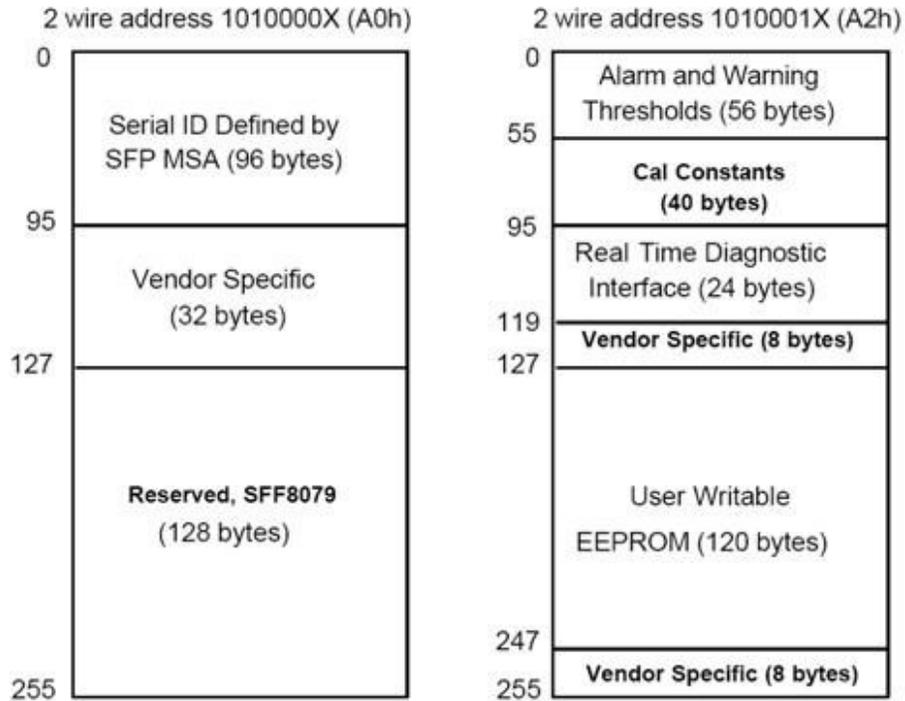

GPON Digital Diagnostic Memory Map

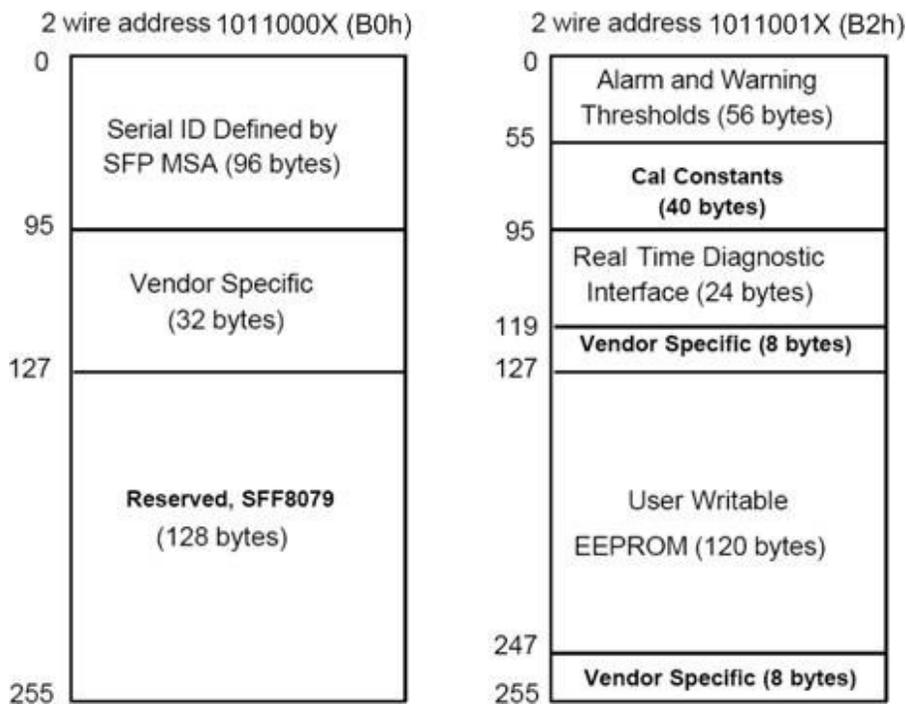

Mechanical Specifications

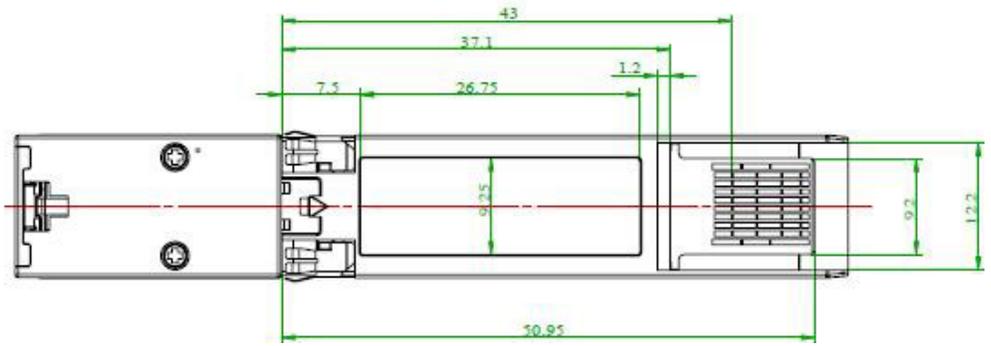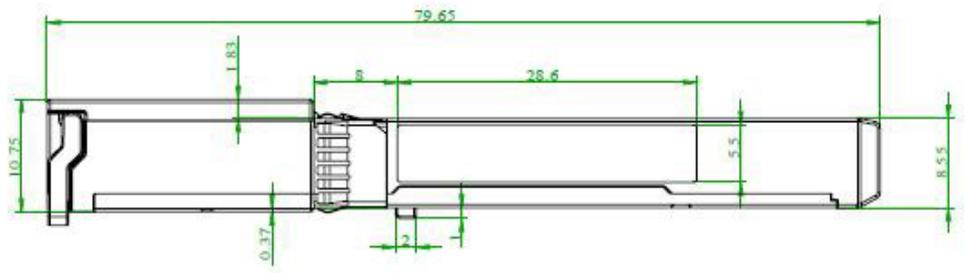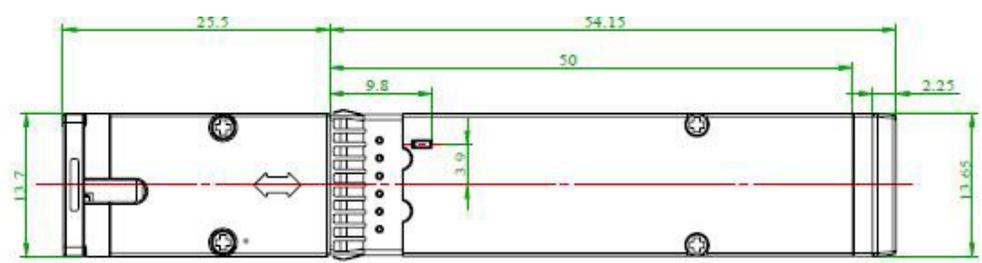

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesupportemea@addonnetworks.com

Telephone: +44 1285 842070