

**HOW TO ORDER:**

- STEP 1 - FO CONSTANT FOR FIBER OPTIC
- STEP 2 - Select the Type of Jacket
- STEP 3 - Select an Appropriate Core Size
- STEP 4 - Determine Length
- STEP 5 - Select the Connector Type
- STEP 6 - Choose Your Color

SEE BUYER'S GUIDE BELOW FOR THE RANGE OF CHOICES

# MULTICOLORED FIBER OPTIC PATCH CABLE

KEY	<b>FO</b>	<b>CMR</b>	<b>50</b>	<b>001</b>	<b>M</b>	<b>STST</b>	<b>BL</b>
	CONSTANT	JACKET	CORE SIZE	LENGTH	CONSTANT	CONNECTORS	COLOR

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	STEP 6	
CONSTANT	JACKET	CORE SIZE	* LENGTH	CONNECTORS	COLOR	
FO	CMR (PVC)	62 - (62.5 Micron OM2)	001M - (1 Meter)	STST - (ST to ST)	BL (Blue)	
	CMP (Plenum)	50 - (50 Micron OM2)	002M - (2 Meters)	SCSC - (SC to SC)	OR (Orange)	
	LZH (Low-Smoke)		10 - (10-Gigabit Laser-Optimized OM3)	003M - (3 Meters)	LCCL - (LC to LC)	GN (Green)
			M4 - (10-Gigabit Laser-Optimized OM4)	004M - (4 Meters)	MTMT - (MT-RJ to MT-RJ)	BR (Brown)
			SM - (Single-Mode OS2)	005M - (5 Meters)	STSC - (ST to SC)	GR (Gray)
				006M - (6 Meters)	STLC - (ST to LC)	WH (White)
				007M - (7 Meters)	STMT - (ST to MT-RJ)	RD (Red)
				008M - (8 Meters)	SCLC - (SC to LC)	BK (Black)
				010M - (10 Meters)	LCMT - (LC to MT-RJ)	YL (Yellow)
				015M - (15 Meters)	SCMT - (SC to MT-RJ)	VT (Violet)
				020M - (20 Meters)		PK (Pink)
				025M - (25 Meters)		AQ (Aqua)
				030M - (30 Meters)		

**EXAMPLES OF FIBER OPTIC CABLE CODES:**

**FOCMR62-001M-STST-BL:**

Cable with a PVC jacket, 62.5-micron core, 1-meter length, ST-ST connectors in blue

**FOCMP50-008M-STLC-OR:**

Cable with a plenum jacket, 50-micron core, 8-meter length, ST-LC connectors in orange

**FOCMRSM-030M-SCLC-YL:**

Cable with a PVC jacket, 9-micron core, 30-meter length, SC-LC connectors in yellow

\*NOTE: IF YOU WISH TO ORDER A CABLE WITH A LENGTH OTHER THAN THOSE SPECIFIED HERE, SUCH AS 12 FEET, PLEASE CALL CUSTOMER SERVICE AT 1.877.877.2269



## FEATURES

SELECT FROM OM1, OM2, OM3, OM4 AND OS2  
CABLE WITH 4 DIFFERENT CONNECTORS,  
12 COLORS AND 13 LENGTHS

IDEAL FOR COLOR-CODED APPS

HIGHER DATA AGGREGATION IN THE  
BACKBONE, RISER AND HIGH-SPEED  
PARALLEL INTERCONNECTS (HSPIS)

FULL COMPATIBILITY WITH THE BROAD  
RANGE OF LASER-BASED AND LEGACY  
PROTOCOL AND APPLICATIONS


INDUSTRY-LEADING CPC®  
COATINGS FOR SUPERIOR MICROBEND  
AND ENVIRONMENTAL PERFORMANCE

CHOOSE FROM 12 COLORS:  
VIOLET, ORANGE, BLUE, BLACK,  
GREEN, GREY, BROWN, RED, PINK,  
WHITE, AQUA AND YELLOW

### LC CONNECTOR



### ST CONNECTOR

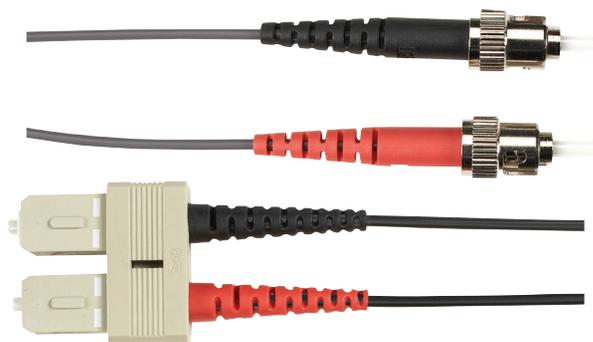

### OVERVIEW

Matching fiber patch cable to your company, department or school colors, or that special color-coded networking application is now much easier with Black Box Multicolor Fiber Patch Cables.

Color your world. These cables come in 12 standard colors that are ideal for color-coding applications, users, security levels and more from the data center to the desktop. With 12 colors to choose from, you have a lot of options. For instance, you can use red to indicate secure lines and blue for unsecure lines. Or use green for finance and white for customer service.

#### SELECT CORE, CONNECTORS, COLORS AND LENGTH

##### CORE:

62.5-micron multimode OM1  
50-micron multimode OM2  
50-micron multimode, 10-GbE laser-optimized OM3  
50-micron multimode, 10-GbE laser-optimized OM4  
9-micron single-mode OS2

##### CONNECTORS:

ST, SC, LC, and MT-RJ in 10 combinations

##### COLORS:

12 colors

##### LENGTH:

13 lengths ranging from 1 to 30 meters

Once you've decided what type of cable you want, look at the charts to see how to build your cable part number. It's super easy and super convenient. No need to get a custom quote.

##### TOP QUALITY:

You can be assured of high performance at all levels. The cables comply with a variety of industry standards.

### TECH SPECS

#### Attenuation –

62.5- $\mu$ m:  
850 nm:  $\leq 2.9$  dB/km;  
1300 nm:  $\leq 0.6$  dB/km;  
50- $\mu$ m PVC: 850 nm:  $\leq 2.6$  dB/km;  
1300 nm:  $\leq 0.6$  dB/km;  
10-GbE 50- $\mu$ m OM3 PVC:  
850 nm:  $\leq 2.3$  dB/km;  
1300 nm:  $\leq 0.6$  dB/km;  
10-GbE 50- $\mu$ m OM4:  
850 nm:  $\leq 2.3$  dB/km;  
1300 nm:  $\leq 0.6$  dB/km;  
9- $\mu$ m: 1310 nm:  $\leq 0.35$  dB/km;  
1550 nm:  $\leq 0.22$  dB/km;

#### Bandwidth – 62.5- $\mu$ m OM1:

Intermediate performance EMB:  
850 nm: 220 MHz/km;  
Legacy performance EMB:  
850 nm: 200 MHz/km;  
1300 nm: 500 MHz/km;  
50- $\mu$ m OM2:  
Intermediate performance EMB:  
850 nm: 510 MHz/km;  
Legacy performance EMB:  
850 nm: 500 MHz/km;  
1300 nm: 500 MHz/km;  
10-GbE 50- $\mu$ m OM3: EMB:  
850 nm: 2000 MHz/km;  
Legacy performance EMB:  
850 nm: 1500 MHz/km;  
1300 nm: 500 MHz/km;  
10-GbE 50- $\mu$ m OM4: EMB:  
850 nm: 4700 MHz/km  
Cladding Diameter – 125  $\mu$ m  
Core Diameter – 62.5  $\mu$ m, 50  $\mu$ m, or 9  $\mu$ m

#### Operating Temperature –

-76 to +185° F (-60 to +85° C);

#### Optimized Data Rate –

62.5- $\mu$ m:  
850 nm: 1 Gbps over 300 m;  
1300 nm: 1 Gbps over 550 m;  
50- $\mu$ m: 1 Gbps over 600 m;  
10-GbE 50- $\mu$ m: 1 Gbps over  
1000 m at 850 nm;  
10-Gbps at 300 m at 850 nm;  
10-GbE 50- $\mu$ m OM4:  
10-Gbps at 550 m at 850 nm;  
9- $\mu$ m OS2: 10 Gbps up to 40 km

#### Standards – 62.5- $\mu$ m:

ISO/IEC 11801: Type OM1 fiber;  
IEC 60793-2-10: Type A1b fiber;  
TIA 492AAAA-A;  
50- $\mu$ m PVC: ISO/IEC 11801:  
Type OM2 fiber;  
IEC 60793-2-10:  
Type A1a.1 fiber;  
TIA/EIA: 492AAAB;  
10-GbE 50- $\mu$ m PVC:  
ISO/IEC 11801:  
Type OM3 fiber;  
Type A1a.2  
TIA 492AAAC;  
10-GbE 50- $\mu$ m PVC:  
Type OM4 fiber;  
Type A1a.3;  
TIA 492AAAD  
Single-mode: ITU-T G.652  
(Categories A, B, C, D);  
IEC 60793-2-50;  
TIA/EIA-492CAAA;  
Telecordia GR-20

